



GYRO TECH™

by NABCO Entrances Inc.

Where quality and service are automatic

WWW.NABCOENTRANCES.COM

1-877-622-2694

JOB NAME: _____


LOCATION: _____

DISTRIBUTOR: _____

DOOR #: _____ DATE: _____


SHEET ____ OF ____

GT8400-01R SIDELOAD HEADER RIGHT HAND INSWING

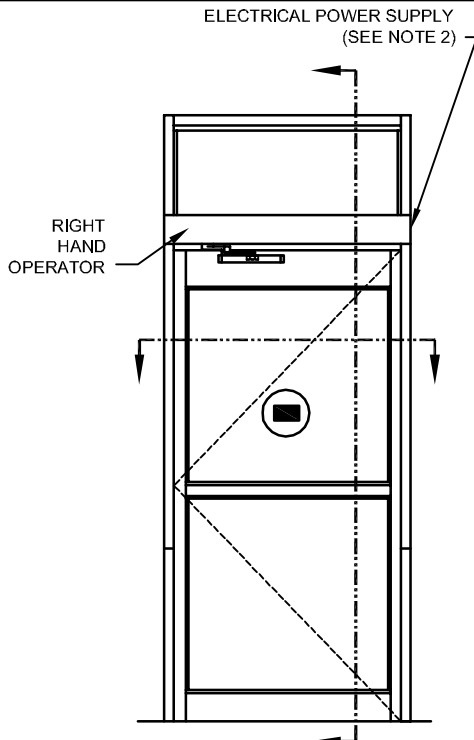


OPERATOR (INTERIOR) SIDE


INTERIOR ELEVATION/PLAN

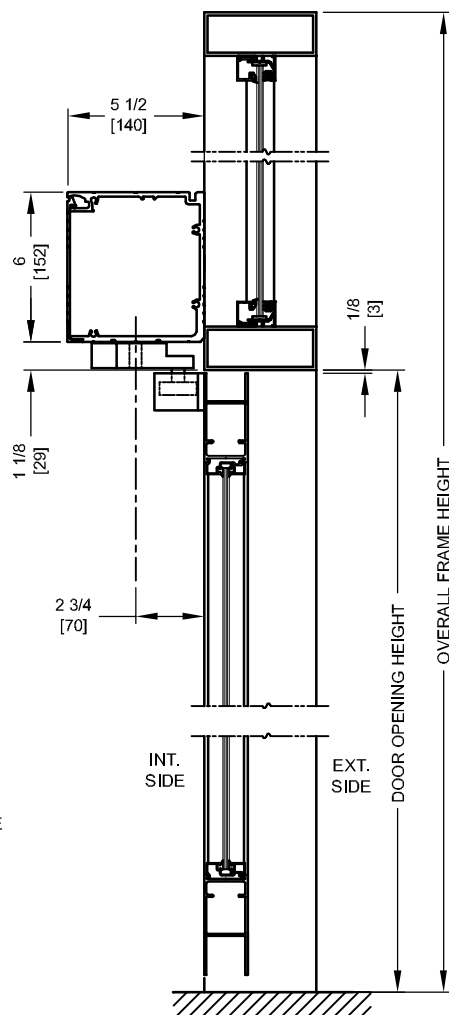


VERTICAL SECTION
BUTT/OFFSET PIVOT OPTION

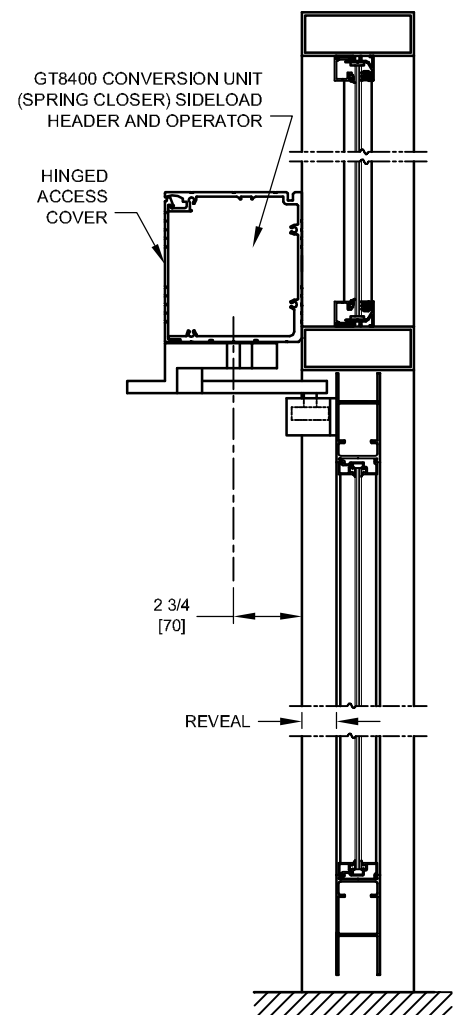

VERTICAL SECTION
CENTER PIVOT OPTION

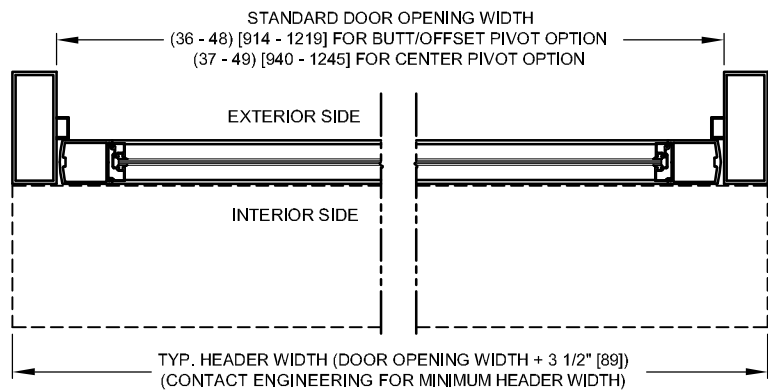

HORIZONTAL SECTION

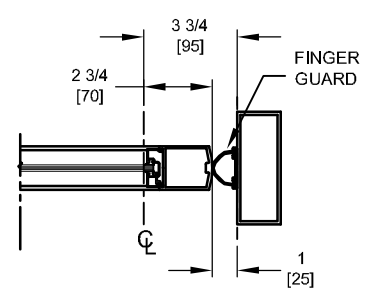

HINGE JAMB AT CENTER PIVOT OPTION

- NOTES:
1. GUIDE RAILS, MATS, PUSH PLATES AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR NABCO/GYRO TECH DISTRIBUTOR.
 2. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
 3. STANDARD HARDWARE SUPPLIED WILL ACCOMODATE DOOR THICKNESS OF 1 3/4" TO 2 1/4".
 4. APPLICATION ON BALANCE DOORS REQUIRES RELOCATION OF THE OPERATOR PIVOT.
 5. SPECIAL ARMS MAY BE REQUIRED ON INSWING DOORS WITH REVEAL GREATER THAN 1 3/4" AND OUTSWING DOORS WITH REVEAL GREATER THAN 16"